


Village of New Concord Wastewater System Inflow and Infiltration Reduction Program

The Village of New Concord is addressing the problem of excess water entering the sanitary sewer system, also known as inflow and infiltration (I&I). “I&I” is a short acronym for a huge problem most sewer communities face, Infiltration and Inflow.

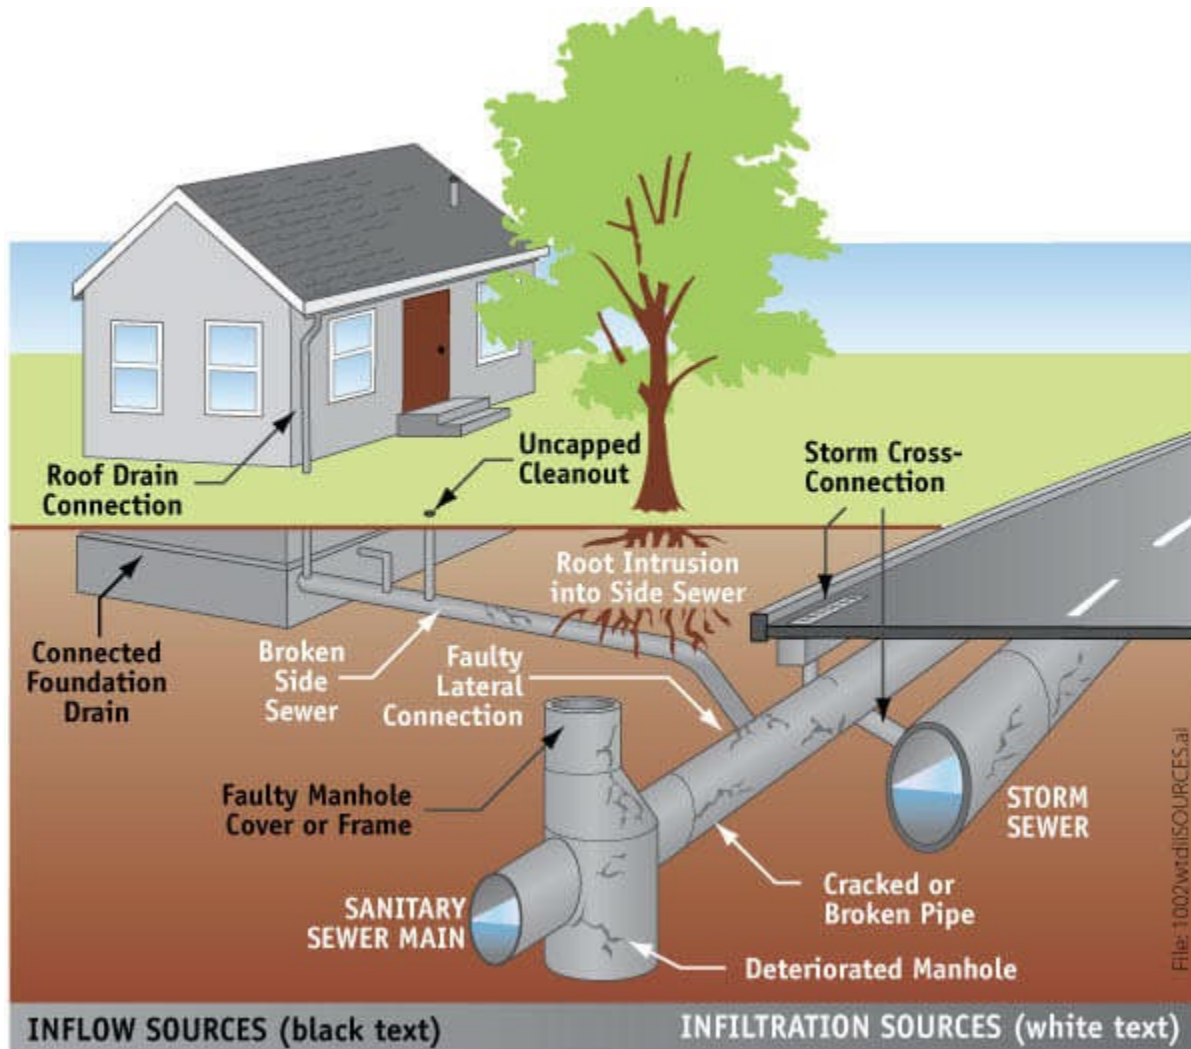

Inflow occurs when rainwater is misdirected into the sanitary sewer system instead of storm sewers. Examples are: roof leaders, yard and area drains, manhole covers, sump pumps, and cross connections from storm drains. The remedy for inflow is to remove improper connections to the sanitary sewer system.

Infiltration occurs when ground water seeps into the sanitary sewer system through cracks or leaks in sewer pipes. The cracks or leaks may be caused by age related deterioration, loose joints, damage or root infiltration. The remedy for infiltration is repairing or replacing the leaking infrastructure. Ignored I&I results in excessive flows in the sewers and into the wastewater treatment plant. This becomes a very costly problem for all of us.

The collective excess rainwater in the sewer system from damaged lateral connections, downspout connections, main line cracks, etc., often causes sanitary sewer overflows which results in the New Concord Wastewater Treatment Plant (WWTP) falling out of Ohio EPA compliance. It also costs more for treatment as the amount of flow treated often exceeds the total water produced and distributed in the system.


I&I affects the quantity of wastewater that needs to be treated, the capacity of New Concord's sewer pipes, wastewater treatment plant and ultimately, the rate businesses and residents pay to operate and maintain them. The worst impact of I&I is the possibility that the excess sewage flows out of the sewer pipe and into our environment. I&I takes up valuable capacity in the WWTP and may limit future sewer connections. I&I adversely affects the nutrient loadings for the plant discharge. If ignored, I&I could cost our community millions of dollars.

The municipality is responsible for maintaining the sewers on streets and public right of ways. New Concord has an on-going program to reduce the quantity of I&I in the sanitary sewer system. A pothole in the street is easy for all of us to see and know that repairs are needed. Since the sewers are underground, special equipment and techniques are used to locate problems. Specialized robotic video cameras are lowered into manholes and travel down the sewer pipes. Flow meters, smoke testing, conductivity sampling is also used in our program to locate problems in sewers. Continued investigations and repairs of sewers will persist for many years.

Homeowners are responsible for maintaining their building sewers on their private property. The Village is asking for your help. You, as a homeowner, can reduce I&I from your property. Check that gutters and outside drains are not connected to the sewer system. Disconnect any drains that are found to be connected. Avoid planting trees and shrubs over building sewers. The roots can damage the structure of the sewer pipe and cause leaks.

Make sure that the caps are on your cleanouts. Lawn mowers have a tendency to break the plastic caps. Replacement lids are available at your local hardware store.

Ensure that basement drains are not connected to the sanitary sewer and install a sump pump to the stormwater drainage system instead. Replace any known broken, leaky or problem sections of sewer pipe that are located on your property.

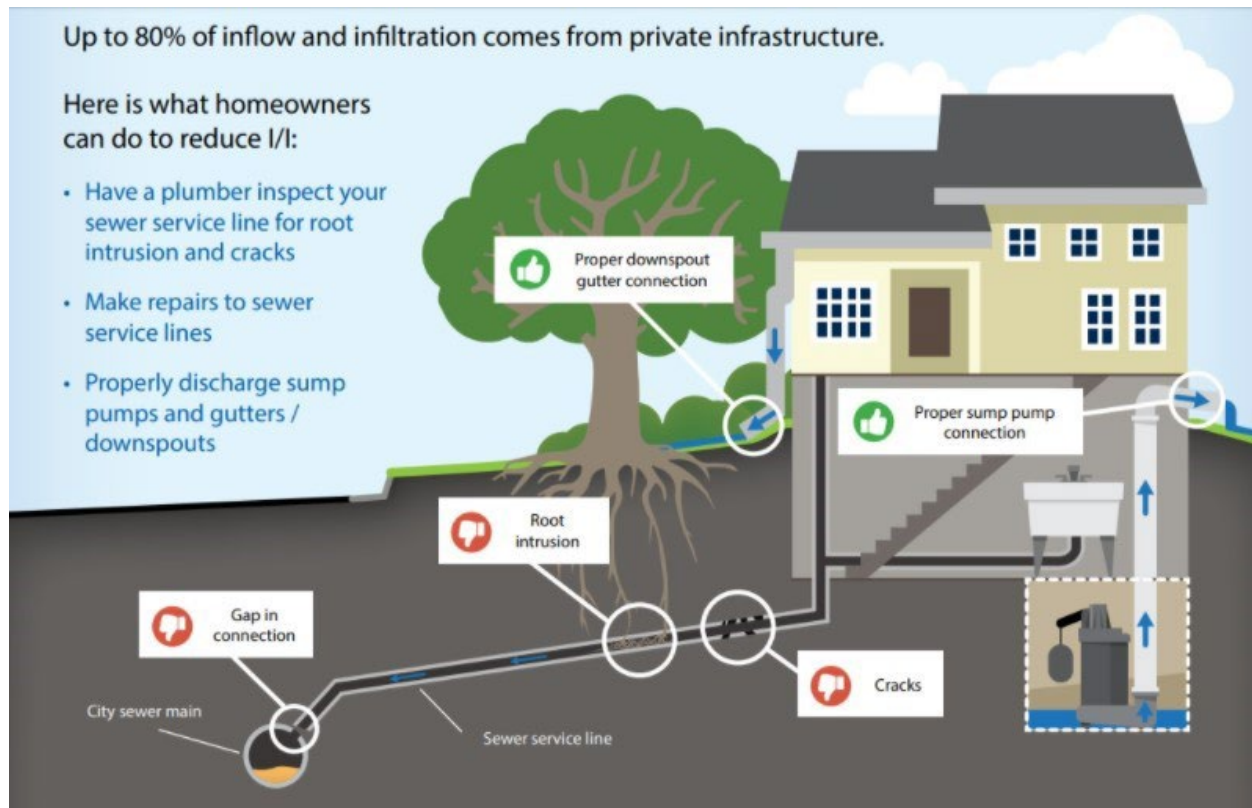

Sump Pumps into the Sanitary Sewer Cause Big Problems!

Besides the fact that connecting sump pumps to the sanitary sewer is illegal, it causes big problems! Sump pumps are designed to pump groundwater and rainwater. Sanitary sewer pipes are designed to carry sewage, not groundwater and rain water.

Usually, the sanitary sewer pipe in the street is only 8 inches in diameter, and often the pipe slope is not very steep. Many 8 inch sewer pipes are installed with a slope of 0.4%. This means that for every 100 feet of pipe, the pipe goes downhill less than 5 inches. This low slope condition is very common in many Ohio sewer collection systems. As you can imagine, there is only so much sewage water that can flow through this pipe.

For this type of sewer pipe, about 300 gallons of water can flow through it in a minute. If more sewage than this tries to get through the pipe in the street, the sewage will surcharge, that is start filling up the sewer lateral pipes that run to the

sewer main from houses. When even more sewage or extra water is sent to the sewer pipe, it will surcharge even farther, eventually pushing back into someone's basement. The sewage might come out of a neighbor's basement toilet or washing machine drain for example.

If hooked up to a house's sewer lateral, a half-horsepower sump pump will pump about 60 gallons to the sewer each minute. That means that if 5 pumps are connected to the sewer, it will be full. Normal sewage flows often fill the sewer main more than half-way already. So, if two or three neighbors in a block illegally connect their sump pumps to their sewer lateral, the flow that is trying to get through the sewer main will be more than its capacity of 300 gallons per minute. The sewage in the pipe is going to start backing up!

It is critical that sump pumps discharge to the yard or storm sewer, *not to the sanitary sewer*. It is illegal to connect your sump pump into your sanitary lateral, and it can cause serious problems!



Shows a sump pump illegally connected to sanitary sewer. This is not allowed in Village of New Concord. The Village appreciates your help.

If you have any questions or concerns feel free to contact me at (740) 826-7671 or by email at rgiroux@newconcord-oh.gov. Upon correction, please forward a photo of the correction and/or a written acknowledgment with your name and address to the email address above or the following mailing address:

Village Administrator
2 West Main Street/P.O. Box 10
New Concord, Ohio 43762